


砂卷砂带转换设备

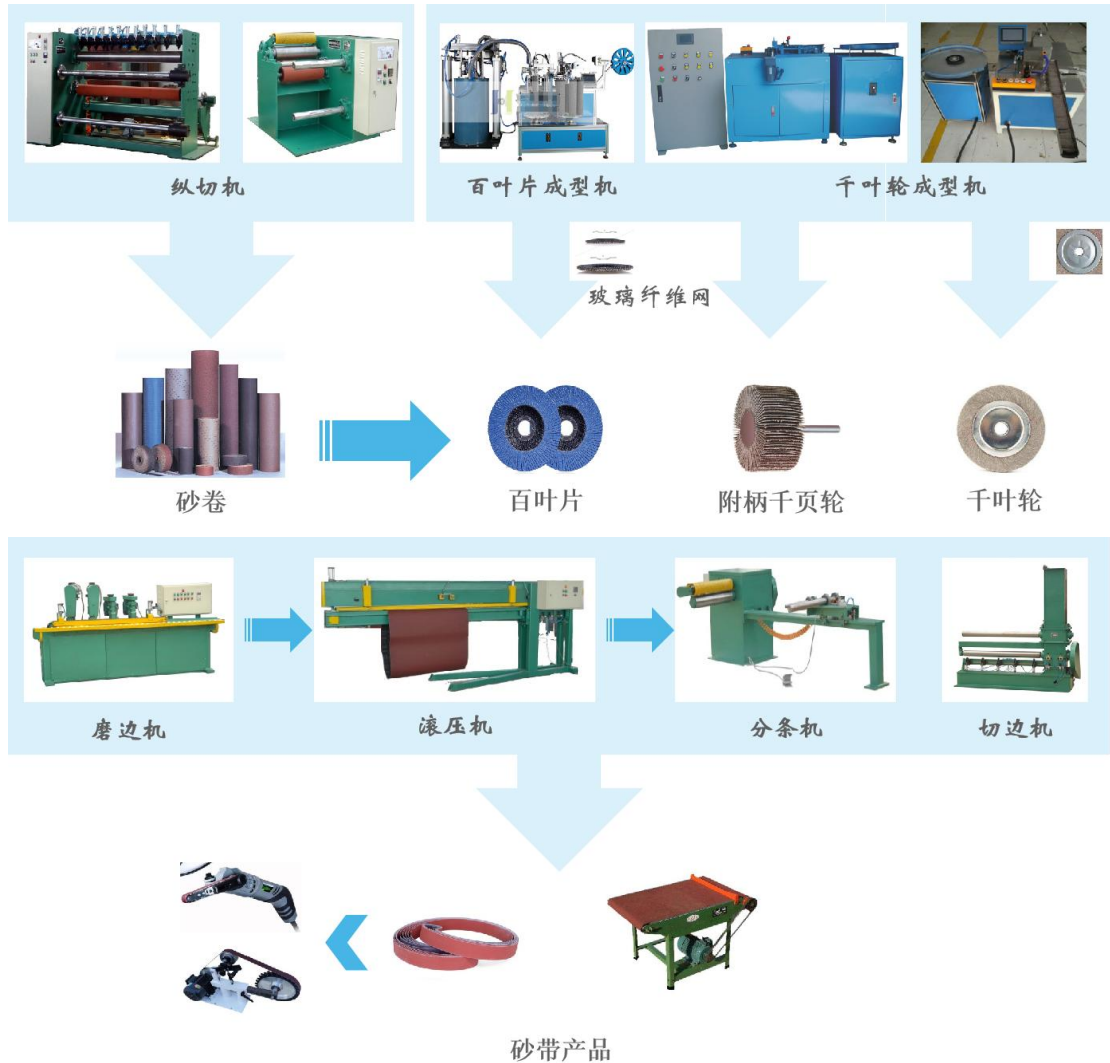

本系列设备用于砂卷的纵切、分条、切边、磨边、砂带成型；以及百叶片、千叶轮等产品的生产。

- 大纵切机
- 小纵切机
- 分条机
- 磨边机
- 油压机、滚压机
- 切边机
- 横切机
- 下料机
- 百叶片成型机
- 等其他产品

A-ZQ-1650A

大纵切机	
裁切范围	50--1650mm
裁切速度	2-10M/min(可调)
落刀压力	6-60KGf(可调)
裁切精度	±0.5MM
电磁涨力	25N.m(可调)
配置	气涨轴, 电子纠偏系统
功率	3KW/6KW
气源压力	0.7MPa



A-ZQ-1650A	
Jumbo Roll Slitter	
Length	50--1650mm
Width	2-10M/min (Variable)
Blade Pressure	6-60KGf (Variable)
Cutting Precision	±0.5MM
Electromagnetically Stretching Force	25N.m (Variable)
Shafts	Air Stretching Shaft, and Center Guiding Mechanism
Power Rating	3KW/6KW
Air Pressure	0.7Mpa

ZQ-500

小纵切	
裁切范围	6---500mm
裁切速度	2-10M/min(可调)
落刀压力	200-800KGf(可调)
裁切精度	±0.5MM
电磁涨力控制	25N.m(可调)
气源压力	0.7MPa



ZQ-500	
Slitting Machine	
Slitting Width	6--500mm
Slitting Speed	2-10M/min (Variable)
Cutting Pressure	200-800KGf (Variable)
Precision of Cutting	±0.5MM

Electromagnetically Stretching Force	25N.m (Variable)
Air Pressure	0.7MPa

A-FT-650

砂带分条机	
分切宽带	10---650mm
分切长度	610--4000mm
落刀压力	500KGf (可调)
砂带涨紧力	180Kgf (可调)
功率	2.2KW
气源压力	0.7MPa



A-FT-400

砂带分条机	
分切宽带	10---400mm
分切长度	330--1500mm
A-YJ-40T	500KGf (可调)
砂带涨紧力	180Kgf (可调)
功率	1.5KW
气源压力	0.7MPa



A-FT-300

砂带分条机	
分切宽带	6---300mm
分切长度	260--800mm
落刀压力	500KGf (可调)
砂带涨紧力	180Kgf (可调)
功率	0.75KW
气源压力	0.7MPa



FT-650	
Belt Slitter	
Slitting Width	10---650mm
Slitting Length	610--4000mm
Cutting Pressure	500KGf (Adjustable)

Stretching Force	180Kgf (Adjustable)
Power Rating	2.2KW
Air Pressure	0.7MPa
A-FT-400	
Belt Slitter	
Slitting Width	10 - 400mm
Slitting Length	330 -1500mm
Blade Pressure	500KGf (Adjustable)
Stretching Force	180Kgf (Adjustable)
Power Rating	1.5KW
Air Pressure	0.7MPa
A-FT-300	
Belt Slitter	
Slitting Width	6 - 300mm
Slitting Length	260--800mm
Blade Pressure	500KGf (Adjustable)
Stretching Force	180Kgf (Adjustable)
Power Rating	0.75KW
Air Pressure	0.7MPa

MBL-01/02

履带式磨边机	
磨边宽带	连续进给, 宽带不限
磨边宽度	30--200M/S(可调)
磨边方式	金刚石, 砂带, 黑金刚
压布方式	气动
功率	0.75KW X 4 +1.5KW
气源压力	0.7Mpa



MBS-01

新型履带式磨边机 (标准 4 磨头)	
磨边宽带	连续进给, 宽带不限
磨边速度	30--200M/S(可调)
磨边方式	金刚石, 砂带, 黑金刚
上胶方式	滚胶, 自动粘贴 PVC 膜
功率	10KW
气源压力	0.7Mpa



MBS-02

新型履带式磨边机	
磨边宽带	连续进给, 宽带不限
磨边速度	30--200M/S(可调)
磨边方式	金刚石, 砂带, 黑金刚
上胶方式	高压喷涂
功率	0.75KW X 4 +1.5KW+2KW
气源压力	0.7Mpa



MBL-01/02	
Skiving Machine Crawler-Type	
Length	Continuous Feed, No Length Limit
Width	30--200M/S (Variable)
Material	Diamond, Belt, Carbonado
Clamping	Pneumatic
Power Rating	0.75KW X 4 +1.5KW
Air Pressure	0.7Mpa
MBS-01	
Skiving Machine Novel Crawler-Type	
Skiving Width	Continuous Feed, No Length Limit
Skiving Speed	30 -200M/S (Variable)
Skiving Material	Diamond, Belt, Carbonado
Glue Application	Glue Rolling, Automatic PVC Film Application
Power Rating	10KW
Air Pressure	0.7MPa
MBS-02	
Skiving Machine Novel Crawler-Type	
Skiving Width	Continuous Feed, No Length Limit
Skiving Speed	30 -200M/S (Variable)
Skiving Material	Diamond, Belt, Carbonado
Glue Application	High-Pressure Spraying
Power Rating	0.75KW X 4 +1.5KW+2KW
Air Pressure	0.7MPa

A-YJ-40T

40T 油压机	
工作压力	40T(可调)
工作面宽度	1600mm
压头温度	20--60℃
压制时间	1---99S
功率	3KW +2KW



A-YJ-15T

15T 油压机/气液压机	
工作压力	15T(可调)
工作面宽度	480mm
压头温度	20--60℃
压制时间	1---99S



GYJ-2400/3500

宽砂带滚压机	
压合方式	滚动压合
压合宽度	1800mm/3200mm
工作温度	20--60℃
压合速度	30--100M/S(可调)
功率	1.1KW +2KW(电热)



A-YJ-40T	
Press 40T	
Working Pressure	40T (Variable)
Worktable Width	1600mm
Temperature of Pressing Head	20--60℃
Pressing Time	1-99S
Electromagnetically Stretching Force	25N.m (Variable)
Shafts	Air Stretching Shaft, and Center Guiding Mechanism
Power Rating	3KW + 2KW

A-YJ-15T

A-YJ-15T	
----------	--

Hydraulic Press 15T / Air-Driven Hydraulic Press	
Pressure	15T (Variable)
Worktable Width	480mm
Pressing Head Temperature	20--60°C
Pressing Time	1-99S
Power Rating	3KW+2KW/2KW

GYJ-2400/3500	
Rolling Press	
Pressing and Jointing	Rolling for Press-Jointing
Pressing Width	1800mm/3200mm
Working Temperature	20-60°C
Pressing Speed	30-100M/S (Variable)
Power Rating	1.1KW +2KW (Electrical Heating)

QB-1650	
宽砂带切边机	
分切范围	100---1650mm
分切长度	1400--3200mm
落刀压力	6-60KGf (可调)
砂带涨紧力	500Kgf (可调)
功率	2.2KW
气源压力	0.7MPa



QB-1650	
Edge Cutting Machine	
Cutting Width	100---1650mm
Cutting Length	1400--3200mm
Blade Pressure	6-60KGf (Variable)
Stretching Force	500Kgf (Adjustable)
Power Rating	2.2KW
Air Pressure	0.7MPa

HQ-1800/2050

S/直线两用切断机	
裁切宽带	1650/1800mm
切断方式	往返滚动
裁切角度	60° -90°
功率	0.5KW
气源压力	0.7Mpa

**A-HQS-ZS1800/2050**

新型宽砂带裁切机	
裁切宽带	1650/1800mm
切断方式	往返滚动
裁切角度	60° -90°
功率	0.75KW
气源压力	0.7Mpa

**HQ-1800/2050**

Scalloped / Straight Cutting - Off Machine

Cutting Length	1650/1800mm
Cutting Method	Forth and Back Rolling
Cutting Angles	60° -90°
Power Rating	0.7KW
Air Pressure	0.7Mpa

A-HQS-ZS1800/2050

Cutter to Length for Segmented with Different Angles

Cutting Width	1650/1800mm
Cutting-Off Method	Forth and Back Rolling
Cutting Angles	60° -90°
Power Rating	0.75KW
Air Pressure	0.7MPa

A-XLS-600

自动直曲两用下料机	
刀口长度	600-800mm
切断方式	冲压
切口角度	±67° 可调
配套功率	1.5KW
气源压力	0.7MPa
工作台尺寸	2000*700*800

**A-XL-500**

500 自动下料机	
裁切宽度	500mm
切断方式	剪切
布压方式	机械压紧
切口角度	±67° /55°
配套功率	1KW
气源压力	0.7MPa

**A-XLS-600**

Automatic Straight/Scallop Cutting Machine	
Cutting Length	600 - 800mm
Cutting Method	Punching
Cutting Angles	±67° (Adjustable)
Worktable Size	2000*700*800

A-XL-500

Cutting Machine 500	
Cutting Width	500mm
Cutting Method	Shearing
Colth Clamping	Mechanical Clamping
Cutting Edge	±67° /55°
Power Rating	1KW
Air Pressure	0.7MPa

百叶片千叶轮设备介绍

Introduction of Machines for Flap Discs and Flap Wheels

第一：砂布分条机 Belt Slitter

本机可多用：可供 10 台全自动排片机的生产

也可更换其它的分条规格的使用（如带柄页轮机的生产规格）

This belt slitter can supply slit belts to 10 set automatic flap disc forming machine.

It can also be used for making different belt in size (For example the rolls for making handled flap wheels.)



自动砂布分条机

1. 适用范围： 1mm-15mm*1500mm 各种品牌砂布、保洁布、尼龙布等材料分切。
2. 技术参数： 有效切宽 1500mm（分条宽度可根据需求定制也可加宽机体）。最大切割直径 700mm，马达功率 5KW
3. 外形尺寸： 2.6m*2.3m*1.2m
4. 机器重量： 1600KG
5. 特点：
 - 1) 机器切刀采用专业进口材料 SKD11 制作，下料快速、分割力强、上下料方便，实现一台机只需 1 人，能够对各种类型各种宽度砂布进行分切便捷的操作；
 - 2) 整机通过自动程序控制，采用光学测偏原理自动校正，不跑偏. 并有自动整平砂布功能；
 - 3) 产品切宽尺寸定位精准，端面整齐，无凹凸现象；
 - 4) 设备单条收料，也可根据客户要求上下双条收料，操作简单，1 人即可。

Abrasive Cloth Belt Slitter

1. Scope of Application: 1mm-5mm*1500mm slitting of all kinds of abrasive cloth material brands, cleaning cloth, and nylon cloth.
2. Technical parameter: effective cutting width of 1500mm (Slitting width can be customized and machine can be widened.), maximum cutting diameter of 700mm, and motor power 5KW.
3. Contour dimension: 2.6m*2.3m*1.2m
4. Weight: 1600kg
5. Features:
 - 1) The cutter is made by specialized imported materials SKD11. Fast blanking, strong cutting force, easy loading and unloading. It only takes one person to operate, and can slit and cut different types and width of abrasive cloth.

2) Complete machine is controlled by PLC automatic program and adopt optical measurement for auto correction.

3) Precision positioning in products cutting width size, the end face is tidy without concave-convex.

4) Single material receipt and double material receipt are both available, easy to operate by a single person.

第二：自动排片机 Flap Disc Forming Machines

半自动排片机，日产量 5000-7000 片，人工上下料，需 1 人常在机器旁生产。

全自动排片机，日产量 5000-7000 片，自动机械手臂上下料，1 人可操作 2 台机械。

A Semi-automatic Flap Disc Forming Machine produces 5000-7000 pieces of flap discs per day, manual loading and unloading raw materials and finish product, and 1 operator needed.

An Automatic Flap Disc Forming Machine produces 5000-7000 pieces of flap discs per day, manipulators loading and unloading raw materials and finish product, and 1 operator needed for two forming machines.



全自动弹性磨盘成型机

全自动弹性磨盘成型机可以生产多种型号圆形磨盘，叶片宽度从 14-35MM 可调，片数可自定义，也可生产双片，长短片，T29，各式花页片（各种型号可根据需求定制）。可实现基体检测，定量涂胶，冲裁排片，整形，上下产品全工序自动化生产。

本机特点：

1. 全机国标钢质钢架结构，以确保设备运行时的稳定性；其中主要受力零部件均采用特种钢热处理精制而成；
2. 电器和伺服电机采用进口品牌 PLC 程序控制，单人即可完成整机操作；
3. 生产产品规格：Φ 50mm~Φ 180mm .T27/T29. 可生产双片产品；
4. 适用基体；45mm--180mm 的塑胶基体和纤维基体；
5. 涂胶量 3-30g（在线可调整）可精确±0.02g；
6. 产品排片片数可在 360° 任一点排片（具体在线调整）；
7. 生产速度：4-5s/个。

注：可另订做半自动弹性磨盘成型机

Automatic Flap Disc Forming Machine

Automatic flap disc forming machines can produce flap discs of various types, the width of vane ranges from 14mm to 35mm. it can be either customized or produce double vanes, long and short vanes, T29, all kinds of flower style (all types needed can be customized). Procedures like backing plate detection, quantitative gluing, blanking arrangement, and reshaping can be done automatically.

Features:

1. The entire machine is made by international steel frame structure to ensure the stability during operation; the major parts under stress are made of special steel.

2. Electric appliance and servomotor are controlled by imported brand PLC that a single person can handle the entire operation.

3. Product specifications: $\Phi 50\text{mm}-\Phi 180\text{mm}$. T27/T29. Double vane products are available.

4. Suitable backing: 45mm-180mm plastic backing and fiber backing

5. Amount of spread: 3g-30g (adjustable online) Accuracy $\pm 0.02\text{g}$

6. Able to arrange vanes at each point 360°

7. Production speed: 4s-5s each

Note: Semi-automatic flap disc molding machine can be customized.

全自动韩式排片机

Automatic Angular Flap Disc Forming Machine

全自动韩式排片机，日产量 **4000-5000** 片，自动机械手臂上下料，**1** 人可操作 **2** 台机械。

An Automatic Angular Flap Disc Forming Machine produces 4000-5000 pieces of flap discs per day, manipulators loading and unloading raw materials and finish product, and 1 operator needed for two forming machines.



第三：烤箱 Oven

烤箱可根据客户的生产量来定烤箱的大小此烤箱可循环生产工作（可用于百页片、带柄页轮、立式页轮等各类胶粘产品）。

Ovens are custom made as per the production size at end users. It can be used to cure flap discs, handled flap wheels, vertical flap discs and other glue applied products.



第四：点胶机 Glue Dispensing Machine

点胶机可内、外圆点胶，如需生产塑胶盖与小盖的产品，或韩式叶轮和花型叶轮等，还需再次进行背面点胶。

手工点胶机，日产量：**12000-15000** 片（需根据人工的熟练程度来决定）。需专人生产操作。

全自动点胶机，日产量：**12000-15000** 片，一人可看管 **2** 以上台机械。只需 1 人工上下料。

A glue dispensing machine can apply glue to external and internal surface of cylindrical objects.
A Manual Glue Dispensing Machine: Daily Production 12000-15000 pieces, depending on the operator's skills. A professional operator is needed.

An Automatic glue dispensing machine: Daily Production 12000-15000 pieces, one person looking after 2 machines and loading and unloading.



全自动高效点胶机 D7

此机型由手工点胶机升级而成，采用 PLC 全自动程序控制，操作更为简便。

适用产品：圆形磨盘，内外圆点胶。

直径：60mm-130mm

特点：

1. 简约机械结构，磨损少、寿命长，噪音低；
2. 全自动加热保温；
3. 灌注量：0.2-3.7cc；
4. 吐胶精度为±1%；
5. 料桶容量为 2L-5L；
6. 本机可根据需求比例调整，内圆胶和外圆胶均可使用；

7. 整机采用钢架结构，可搭配各式流水线，也可单独使用；
8. 本机可根据需求比例调整，微电脑式计量处理器，教导式记忆定量和速度，吐胶量和速率可轻易改变，也可连续供胶；
9. 管电路 PTC 感应，全自动电子加热恒温功能，做到稳定而高效的生产成套产品。

Automatic Glue Dispensing D7

The model is upgraded from manually dispensing machine. It takes PLC full-automatic program control, the operation is more simple and convenient.

Applicable products: circular grinding table, inner circle and outer circle dispensing.

Diameter: 60mm-130mm

Features:

1. Simple mechanical structure, less wear and tear, longer lifespan, lower noise
2. Full-automatic heating and heating insulation
3. Perfusion increment: 0.2-3.7cc
4. Spit glue accuracy: $\pm 1\%$
5. Capacity of material barrel: 2L-5L
6. This machine can be adjusted according to scale needed, both inner circle and outer circle can be used.
7. The machine uses steel structure, and can either match various assembly lines or be used alone.
8. This machine can be adjusted according to demand, and has microcomputer type metering processor, teaching type memory quantity and speed. The quantity and rate of spitting glue can be easily changed and also can be continuous.
9. Tube circuit PTC induction, full-automatic electronic heating and thermostatic function, stable and efficient production of complete sets of products.

全自动高效点胶机 D8

此机型采用微电脑全自动式转盘控制，可实现基体检测，定量涂胶，上下产品，上下垫片的全工序自动化生产，操作简单，单人可完成多台设备操作。

适用产品：圆形磨盘外圆点胶。

直径：60mm-130mm

特点：

1. 简约机械结构，磨损少、寿命长，噪音低；
2. 全自动加热保温；
3. 灌注量：0.2-3.7cc；
4. 吐胶精度为 $\pm 1\%$ ；
5. 料桶容量为2L-5L；
6. 本机可根据需求客户要求机械手全自动增加垫片；
7. 本机可根据需求比例调整，微电脑式计量处理器，教导式记忆定量和速度，吐胶量和速率可轻易改变，也可连续供胶；
8. 管电路 PTC 感应，全自动电子加热恒温功能，做到稳定而高效的生产成套产品。

Automatic Glue Dispensing D8

The model has a microcomputer and an automatic turntable. It detects the backings of flap wheels, apply quantitative glue, and load and unload products and gaskets. One operator can work on multiple machines.

Applicable Products: circular grinding table, outer circle dispensing.

Diameter: 60mm-130mm

Features:

1. Simple mechanical structure, less wear and tear, longer lifespan, lower noise
2. Full-automatic heating and heating insulation
3. Perfusion increment: 0.2-3.7cc
4. Spit glue accuracy: $\pm 1\%$
5. Capacity of material barrel: 2L-5L
6. This machine can increase the gaskets automatically according to customers' requirements.
7. This machine can be adjusted according to demand, and has microcomputer type metering processor, teaching type memory quantity and speed. The quantity and rate of spitting glue can be easily changed and also can be continuous.
8. Tube circuit PTC induction, full-automatic electronic heating and thermostatic function, stable and efficient production of complete sets of products.

第五：贴标机 Labeling Machine

全自动贴标机，各种圆形磨盘与砂轮片的贴标。日产量：**12000-15000** 片，一人可看管 **2** 台机，只需人工上下料（下料还可以增加流水线形式，自动点数）。

An automatic Labeling Machine produces 12000-15000 pieces of products. One person can operate on two machines, only manual loading and unloading required. (The unloading can be streamlined and products can be counted.).



全自动砂轮片贴标机 (180A)

本贴标机专为磨料磨具产品设计，具有专一性，专用于砂轮片和平面百页片的基体平面贴标。集于自动放收圆形磨盘和输送与一体的 PLC 全自动化程序的精装机型，在确保准备贴标的同时，大幅提高生产效率。

1. 贴标精度： $\pm 1\text{mm}$ （不含产品、标签误差）
2. 贴标速度： 30~40 件/分钟，取决于产品长度和质量；
3. 适用产品： 客户所提供的产品及各类圆形磨盘；

4. 适用标签： 客户所提供的卷装标签；
5. 适用电源： 220V50/60HZ；

Full-automatic Grinding Wheel Labeling Machine

The labeling machine is specially designed for grinding wheel plane labeling.

1. Labeling accuracy: $\pm 1\text{mm}$ (products and label mistake excluded), adjusting level has an obvious effect on labeling accuracy.
2. Labeling velocity: 30-40 pieces/min, depending on length and quality of products.
3. Applicable products: products provided by customers.
4. Applicable tags: roll labels provided by customers.
5. Power supply: 220V 50/60Hz.

第六：包装机 Packaging Machine

全自动套膜机，适用产品：各式圆形磨盘、砂轮片等。生产能力： ≤ 5000 组/小时（膜高 $\leq 250\text{mm}$ ），圆形磨盘外径：**70mm—150mm**，（还可按需求定制），固定直径，不固定高。

An automatic Shrink Film Packing Machine is designed to pack various round flap discs, flap wheels, and grinding wheels. Production: ≤ 5000 Groups/Hour (Film height is $\leq 250\text{mm}$). Round products with external diameter: 70mm—150mm, fixed diameter but not fixed height.



自动套膜缩膜包装机

此机型速度最高可达到 5000 组/小时（产能需根据实际人工摆放速度），是专用于圆形磨盘或其它类似产品的非标准机型，不但套标位置精度高，且收缩后更能突出产品的完美外形与包装质量。

1. 适用产品：各式圆形磨盘、砂轮片等。
2. 套膜合格率： $\geq 99.9\%$
3. 生产能力： ≤ 5000 组/小时（膜高 $\leq 250\text{mm}$ ）
4. 适用薄膜：PVC
5. 膜签长度：100mm—250mm（可订做更高的套膜尺寸）
6. 膜签厚度：0.035mm~0.09mm
7. 卷膜外径： $\leq 500\text{mm}$
8. 圆形磨盘外径：70mm—150mm，（还可按需求定制）
9. 适用电源：380V, 50/60HZ, 3 相 4 线

Automatic Shrink Film Packing Machine

Used exclusively in grinding wheels or other non-standard machine models similar to the product, the model can reach the velocity of 5000 sets/hour (capacity is based upon actual manual placing velocity). It can not only achieve a precision standard set position, but also can maintain perfect shapes and quality after shrink.

1. Applicable products: grinding wheels (specified by customers)
2. Sets of standard yield: $\geq 99\%$
3. Production capacity: ≤ 5000 groups/hour (elevation $\leq 250\text{mm}$).
4. Applicable film: PVC
5. Label length: 100mm-250mm (higher length can be customized)
6. Label thickness: 0.035mm-0.19mm
7. Film roll OD: $\leq 500\text{mm}$
8. Flap discs OD: 70mm-150mm, (can be customized)
9. Power supply: AC380V, 50/60Hz, 3 phase 4 wire

自动封缩包装线

此机型专用于圆形磨盘或其它类似产品的非标准机型配套使用 PE 材质的单层卷膜. 集于撞膜, 热收缩, 输送与一体的自动化程序控制大幅度提高生产效率。

产品特点:

1. 适用产品: 各式圆形磨盘、砂轮片及大小基体等
2. 包装直径范围 70MM 至直径 180MM (还可按需求定制)
3. 撞膜, 热收缩, 输送与一体的自动化程序控制。
4. 操作简单、只需上下产品即可, 还可连接其它设备一体的使用。

Automatic Sealing Packaging Line

This machine is dedicated to circular flap discs or other non-standard models similar to products supporting the use of PE single layer film rolls. Automatic program control integrates hitting film, thermal contraction and transport, greatly improving the production efficiency.

Product features:

1. Applicable products: all kinds of circular flap discs, grinding wheels and all sizes of backing plates, etc.
2. The diameter range of packing: 70mm-180mm (can be customized)
3. Automation program control integrating hitting film, thermal contraction and transport.
4. Simple operation that only takes shelving products and also can be used with other devices

第七: 带柄页轮

第一: 带柄页轮机单工位带柄页轮机, 日产量正常约为 **3000** 个(产量具体以实际为准, 因产品的直径, 产品页数都有关系), 双工位比单工位产量可提高 **70%**, **5100** 个左右。生产规格从直径 **25MM-80MM** (也可生产立式页轮)



带柄页轮排片机

此机型采用 PLC 全自动程序控制，专用于各式带柄页轮生产和立式百页片生产。本机提高工作效率，减少人工成本。

适用产品：带柄页轮和立式百页片。

特点：

1. 刀片采用 YT 高分子材料制作，耐磨不易耗损
2. 主控电路采用先进的进口品牌电路控制；操作简单、直观、方便、更稳定耐用
3. 电机采用进口原状齿轮减速马达，耐高温，寿命长，功率大。
4. 使用范围：

直径： 25、30、35、40、50、60、70、80 等

厚度： 15、20、25、30、40、50 等。

注：本机型也有双工位带柄页轮机，产量相比单工位带柄页轮机提高 70%。

Mounted Flap Wheel Machines

The model adopts PLC full-automatic controlling program, and is used exclusively for all kinds of shank mounted flap wheels and vertical flap discs. It is useful in improving working efficiency and reducing labor costs.

Features:

1. The blade is made of YT high polymer materials. It is wear-resistant and not prone to expansion.

2. Main control circuit adopts advanced circuit control, which is easy to operate, intuitive, convenient, more stable and durable.

3. The generator adopts imported original gear motor that is resistant to high temperature, has longer lifespan and larger power.

4. Scope of application:

Diameter: 25, 30, 35, 40, 45, 50, 60, 70, 80, etc.

Thickness: 15, 20, 25, 30, 40, 50, etc.

Note: This model also has double-position shank mounted flap wheel machines, whose yield is 70% higher than single-position shank mounted flap wheel machines.

第八：全自动带柄页轮点胶机

全自动带柄页轮点胶等各类中心点胶产品。1 人可看管 2 台机（还可 1 人生产带柄页轮产品同时看管此机器）。

带柄页轮点胶机

此机型采用滑轨行进模式，PLC 全自动程序控制，定位精准，点胶准确。专用于带柄页轮自动点胶，加大生产效率，减少人工成本。

特点：

1. 简约机械结构，磨损少、寿命长，噪音低
2. 全自动加热保温
3. 灌注量：0.2-3.7cc
4. 吐胶精度为 $\pm 1\%$
5. 料桶容量为 2L-5L
6. 适用范围：直径：20、25、30、35、40、45、50、60、70、75、80 等各类中心点胶产品

Shank Mounted Flap Wheel Dispensing Machine

The machine uses slide rail moving patterns and PLC full-automatic program to control, which has high accuracy of positioning and dispensing. It is designed specially for shank mounted flap wheel automatic dispensing, increasing production efficiency and reducing labor costs.

Features:

1. Simple mechanical structure, less wear and tear, longer lifespan, lower noise
2. Full-automatic heating and heating insulation
3. Perfusion increment: 0.2-3.7cc
4. Spit glue accuracy: $\pm 1\%$
5. Capacity of material barrel: 2L-5L
6. Diameter: 20, 25, 30, 35, 40, 45, 50, 60, 70, 75, 80, and all kinds of center dispensing products.